



**LPS**  
(Blank type only)

**UL** US  
UL508

**UL** US  
UL60950-1

**EN61558**

**CB**  
IEC60950-1

**CE**



## Features

- Ultra slim design with 70mm(4SU) width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W
- Isolation class II
- Pass LPS (Limited power source) for Blank type
- DC output voltage adjustable
- Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection (working temperature:-30~+70°C)
- DIN rail TS-35/7.5 or 15 mountable
- Over voltage category III
- LED indicator for power on
- 3 years warranty

## Applications

- Household control system
- Building automation
- Industrial control system
- Factory automation
- Electro-mechanical apparatus

## Description

HDR-100 is one economical ultra slim 100W DIN rail power supply series, adapt to be installed on TS-35/7.5 or TS-35/15 mounting rails. The body is designed 70mm(4SU) in width, which allows space saving inside the cabinets. The entire series adopts the full range AC input from 85VAC to 264VAC(277VAC operational) and conforms to EN61000-3-2, the norm the European Union regulates for harmonic current. HDR-100 is designed with plastic housing that it can effectively prevent user from electric hazards. With working efficiency up to 90%, the entire series can operate at the ambient temperature between -30°C and 70°C under air convection. It is equipped with constant current mode for over-load protection, fitting various inductive or capacitive applications. The complete protection functions and relevant certificates for home automations and industrial control apparatus (IEC60950-1, UL508, UL60950-1, EN61558-2-16) make HDR-100 a very competitive power supply solution for household and industrial applications.

## Model Encoding

**HDR - 100 - 12 N**

Performance difference

Output voltage

Rated wattage


Series name

Type	Description	Note
Blank	92W max, Pass LPS with a narrower output adjustable range	In stock
N	100W max, Non-LPS with a wider output adjustable range	In stock


## SPECIFICATION

MODEL		HDR-100-12	HDR-100-12N	HDR-100-15	HDR-100-15N	HDR-100-24	HDR-100-24N	HDR-100-48	HDR-100-48N
OUTPUT	DC VOLTAGE		12V		15V		24V		48V
	RATED CURRENT		7.1A	7.5A	6.13A	6.5A	3.83A	4.2A	1.92A 2.1A
	CURRENT RANGE		0 ~ 7.1A	0 ~ 7.5A	0 ~ 6.13A	0 ~ 6.5A	0 ~ 3.83A	0 ~ 4.2A	0 ~ 1.92A 0 ~ 2.1A
	RATED POWER		85.2W	90W	92W	97.5W	92W	100.8W	92.2W 100.8W
	RIPPLE & NOISE (max.) Note.2		120mVp-p		120mVp-p		150mVp-p		240mVp-p
	VOLTAGE ADJ. RANGE	Pass LPS	12 ~ 13V		15 ~ 17V		24 ~ 25.5V		48 ~ 48.7V
		Non LPS	12~ 13.8V		13.5 ~ 18V		21.6 ~ 29V		43.2 ~ 55.2V
	VOLTAGE TOLERANCE Note.3		± 2.0%		± 1.0%		± 1.0%		± 1.0%
	LINE REGULATION		± 1.0%		± 1.0%		± 1.0%		± 1.0%
	LOAD REGULATION		± 1.0%		± 1.0%		± 1.0%		± 1.0%
	SETUP, RISE TIME		500ms, 60ms/230VAC		500ms, 60ms/115VAC at full load				
HOLD UP TIME (Typ.)		30ms/230VAC		12ms/115VAC at full load					
INPUT	VOLTAGE RANGE		85 ~ 264VAC (277VAC operational )		120 ~ 370VDC (390VDC operational )				
	FREQUENCY RANGE		47 ~ 63Hz						
	EFFICIENCY (Typ.)		88%		89%		90%		90%
	AC CURRENT (Typ.)		3A/115VAC 1.6A/230VAC						
	INRUSH CURRENT (Typ.)		COLD START 35A/115VAC		70A/230VAC				
PROTECTION	OVERLOAD Note.4		HDR-100 : 102 ~ 110% rated output power ; HDR-100-xxN : 105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed						
	OVER VOLTAGE		14.2 ~ 16.2V		18.8 ~ 22.5V		30 ~ 36V		56.5 ~ 64.8V
			Protection type : Shut down o/p voltage, re-power on to recover						
ENVIRONMENT	WORKING TEMP.		-30 ~ +70°C (Refer to "Derating Curve")						
	WORKING HUMIDITY		20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY		-40 ~ +85°C, 10 ~ 95% RH non-condensing						
	TEMP. COEFFICIENT		± 0.03%/°C (0 ~ 50°C) RH non-condensing						
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6						
	OPERATING ALTITUDE		2000 meters						
	OVER VOLTAGE CATEGORY		III ; According to EN61558, EN50178, EN60664-1, EN62477-1 ; altitude up to 2000 meters						
SAFETY & EMC (Note 6)	SAFETY STANDARDS		UL60950-1, UL508, TUV EN61558-2-16, IEC60950-1 approved; Design refer to TUV EN60950-1						
	WITHSTAND VOLTAGE		I/P-O/P:4KVAC						
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH						
	EMC EMISSION		Parameter		Standard		Test Level / Note		
			Conducted		EN55032(CISPR32)		Class B		
			Radiated		EN55032(CISPR32)		Class B		
			Harmonic Current (Note 5)		EN61000-3-2		Class A		
			Voltage Flicker		EN61000-3-3		-----		
	EMC IMMUNITY		EN55024, EN61000-6-2, EN61204-3						
			Parameter		Standard		Test Level /Note		
			ESD		EN61000-4-2		Level 3, 8KV air; Level 2, 4KV contact, criteria A		
			Radiated Susceptibility		EN61000-4-3		Level 3, criteria A		
			EFT/Burest		EN61000-4-4		Level 3, criteria A		
			Surge		EN61000-4-5		Level 4, 2KV/L-N, criteria A		
			Conducted		EN61000-4-6		Level 3, criteria A		
Magnetic Field			EN61000-4-8		Level 4, criteria A				
Voltage Dips and interruptions			EN61000-4-11		> 95% dip 0. 5 periods, 30% dip 25 periods, > 95% interruptions 250 periods				
OTHERS	MTBF		856.5K hrs min. MIL-HDBK-217F (25°C)						
	DIMENSION		70*90*54.5mm (W*H*D)						
	PACKING		0.27Kg; 48pcs/14Kg/1.10CUFT						
NOTE		1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf & 47μf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Constant current limiting operation within 50% ~100% rated output voltage; protection type for short circuit is hiccup mode,it will recover automatically after fault condition is removed. 5. Harmonic current test at 90% load for HDR-100-xxN. 6. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)							


## Block Diagram

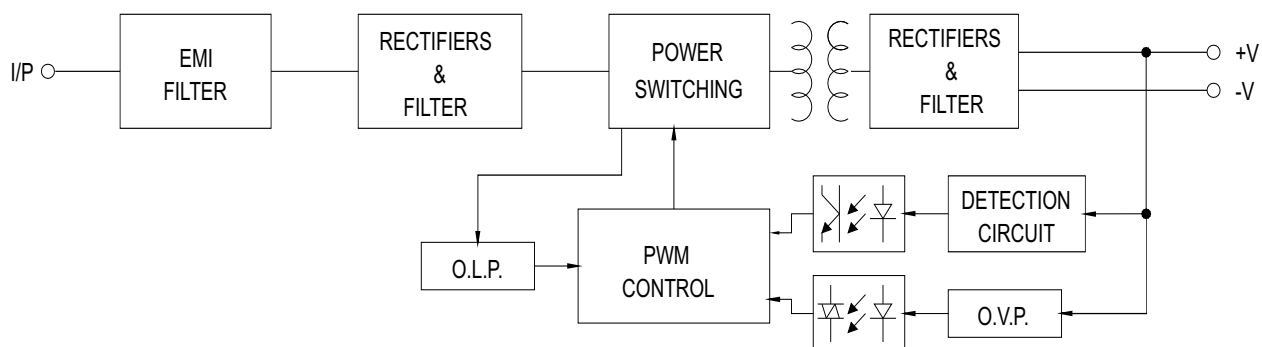

## Derating Curve VS Ambient Temperature

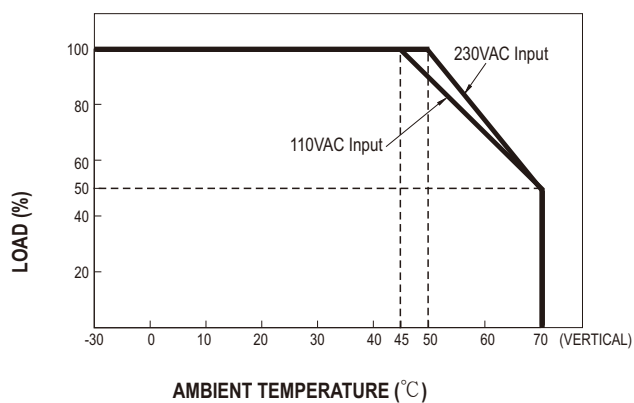


## Output Derating VS Input Voltage

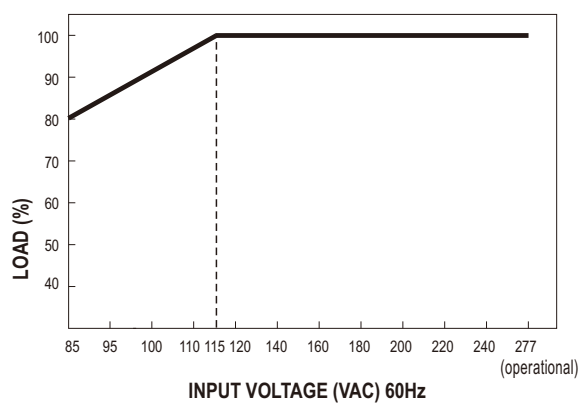

## Mechanical Specification

(Unit: mm , tolerance  $\pm 0.5\text{mm}$ )

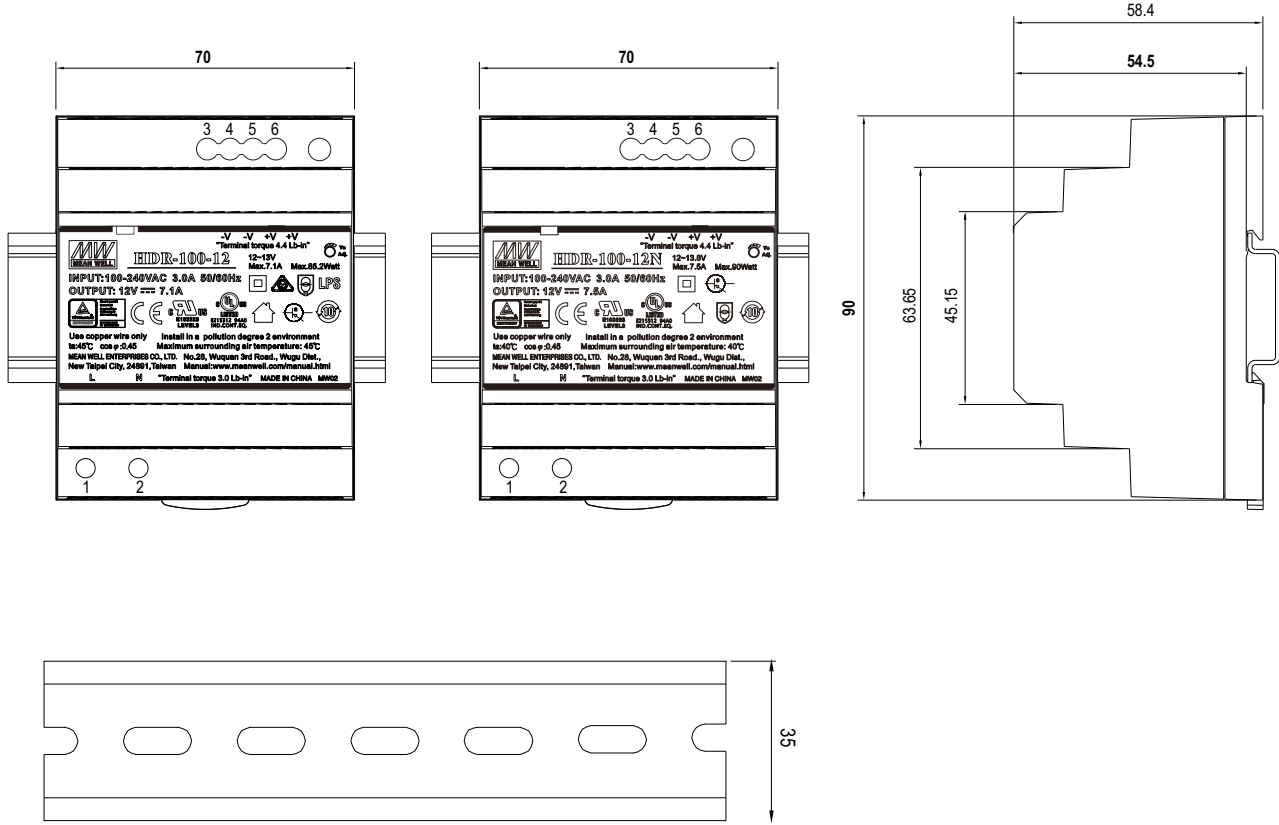

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

## Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	3,4	-V
2	AC/N	5,6	+V

## Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>